

## DON'T SPOIL THE COIL

Protect your metal coils during stacking and shipping with CoilSafe.™The easy way to prevent costly damage to edges of metal coil.

Dense CoilSafe material is more moisture-resistant than wood—even in damp environments. In fact, CoilSafe is excellent for overseas shipping\*. Plus CoilSafe has a linen-like surface that grabs the load, minimizing slipping and shifting.

<sup>\*</sup> Meets requirements for ISPM-15



Sensible. Sound. Solutions.









CoilSafe separators in segmented strip form are shipped on 48" x 48" neatly stacked skids that can be placed close to banding lines for easy access as coils are being packed.


- Splinter-free handling
- Material grips the coil, reducing slippage
- · Sap-free, will not damage or discolor metal
- · Uniform in thickness for better stacking
- Pre-slit, snaps apart at desired length, no sawing required
- · Moisture-resistant, drier than kiln-dried wood
- Recycled material reduces waste
- · Eliminates damage to material
- Saves labor cost





Uniform in thickness, density and desired length, CoilSafe 4", 6", 8" or 12" segments, break apart easily for fast, splinter-free application.



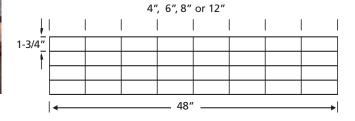

CoilSafe™ Thickness		Per Skid		
Inches	Decimal	MM	48" Strips	
7/16"	.4375"	11mm	4032	
5/8"	.6250"	16mm	2800	
3/4"*	.7500"	19mm	2240	
1″	1.000"	25mm	1680	
1-1/2"	1.500"	38mm	1120	
2"	2.000"	50mm	720	
All skids weigh 2,400 lbs. *HD substrate				

All thickness are nominal



Sensible. Sound. Solutions.



800-257-9491 • Technical Support call Ext. 1332 or e-mail techhelp@homasote.com

www.homasote.com